2位伺服步进位控端子模块 S066

2 axis servo/stepper control terminal block S066

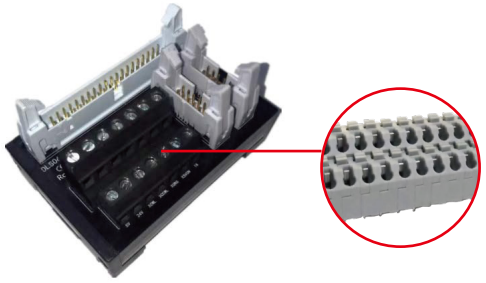

注：需要弹片端子请在型号尾加上-"T"
即：S066-T

CE RoHS EU指令 省空间 PLC 整洁配线

特点 Features

本端子台在最小的空间内集成了控制线路；
XY两轴直接与上位的位置控制模块连接；
只需在端子台上接入XY轴的限位原点信号；
配上伺服专用线,可直接与伺服放大器50P接头对接；
最人性化,最小系统的位置控制接线模块;
节省配线工时,电箱美观整洁。

Compact module for space saving design;
The X axis and Y-axis are directly connected to the upper position control module;
Only X-axis and Y-axis limiting origin signals are required to be input to the terminal block;
When used in combination with servo cable, it can be directly connected to the 50pin joint on the servo amplifier;
A specially designed compact module for position control modules, providing minimum wiring work;
Saves wiring man hours and keep the switching cabinet tidy.

部品详细参数 Pats detailed pameters

MIL插孔连接器	主体材料 Body Material	PBTV-0防火等级	参考标准 Reference Standand	UL
	端子材料 Terminal Material	铜合金	额定电流 Rated current	2.0A
	电镀层 Plating	针角镀金金	接触电阻 Contact resistance	<20毫欧
欧式接线端子	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	
	端子材料 Terminal Material	磷铜	额定电流 Rated current	10A
	电镀层 Plating	镀锡	扭矩 Torque	0.4NM(3.5lb-in)
端子主体	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	CE
	端盖材料 Cover Material	PC V-0防火等级	固定螺丝材料 Fixing screws Material	SUS304
	扣件 Fasteners	PC V-0防火等级	PCB板材料 PCB board material	FR-4

发货日期 Ship Date

17:00前订购的库存品可以当日发货 Delivery immediately with confirmed order before 17:00PM day off when there is stock in the warehouse	1~8个 1-8 pcs	9个以上 More than 9pcs
	次日（当日）发货 1-2 day	另定发货时间 Agreed by both parties

1.最小起订量1个正常交期7~10天；
2.特殊产品交期20天以上；
3.非损耗品非人为损坏，一年包换，5年包修；

1: MOQ 1 PCS delivery date 7-10 days for regular models
2: more than 20 days for customerized models
3: Guarantee： one year refundable and 5 year warranty under condition of non-human forces damage

关联产品 Related products

L122系列缆线
L112系列缆线

注：见本册缆线系列

剥线长度 Wire stripping Recommendation

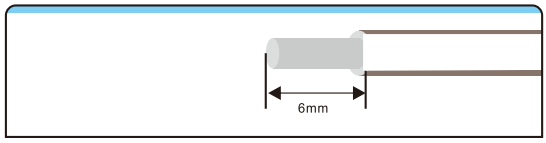

输入侧额定值/性能 Rated current and voltage specification

额定电流 Nominal operating current	1A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1. 5 mm² Following / AWG16

输入/输出侧对应 Corresponding Input/Output Devices

输入侧对应 Corresponding Input Devices	Manufacturers
	Position Control Module
输出侧对应 Corresponding output Devices	Servo drive signal interface

外形图 Dimensions

正视图 侧视图 (单位:mm)

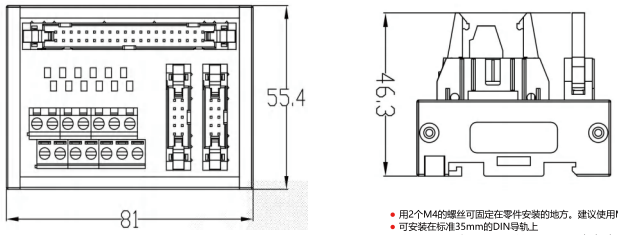

- 用2个M4的螺丝可固定在零件安装的地方。建议使用M4X16的螺丝，螺纹孔深3mm以上
- 可安装在标准35mm的DIN导轨上
- Screw Mounting:use M4*16 screw,screw hole depth≥ 3mm.
- DIN Rail Mounting:Standard 35mm DIN RAIL.

配线图 Wiring Diagram

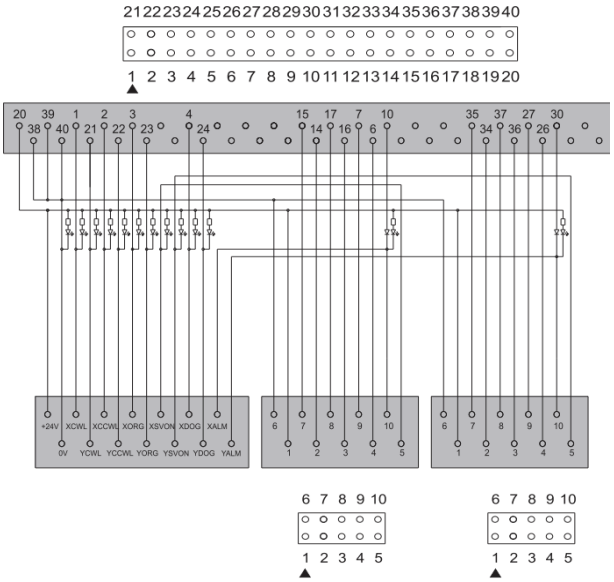

S066